

# Digital Flow Meter GLF-1000

Instant check for gas flow rate

- Handy and compact
- Wide flow rate range
- Easy to operate



**AUTHORIZED DISTRIBUTOR**

MZ-Analysentechnik GmbH, Barcelona-Allee 17 • D-55129 Mainz

Tel +49 6131 880 96-0, Fax +49 6131 880 96-20

e-mail: [info@mz-at.de](mailto:info@mz-at.de), [www.mz-at.de](http://www.mz-at.de)

## Digital Flow Meter GLF-1000


GL Sciences' GLF-1000 adapts Differential Pressure (DP) method.

The GLF-1000 measures target gases accurately and instantly.

With a wide measurable range, up to 1000 mL/min, and auto power-off function, GLF-1000 brings safety and accuracy to labs.


### Specifications

Gases	: Helium, Nitrogen, Hydrogen, Air ※Not explosion-proof structure
Range	: 1 - 1000 mL/min
Accuracy (He)	: 5 - 50 mL/min ±10 % of flow reading or ±0.8 mL/min whichever is greater
	: 50 - 900 mL/min ±5 % of flow reading
Temperature Range	: 5 - 40 °C
Battery	: 9 volt square shape battery 1pcs
Dimension	: 80(W) × 145(D) × 38.5(H) mm
Weights	: 180 g excluding the battery
Others	: Auto power off function Battery monitor function CE Certified

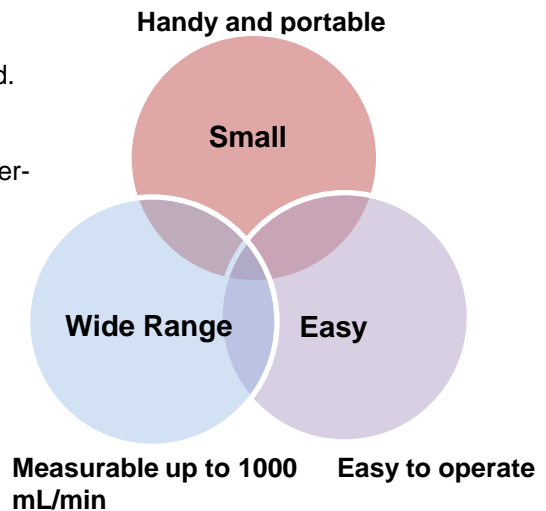

### Capillary Column Connecting Adaptor (Optional)

Connect the adaptor to the silicon tube and clamp the nut to fix the whole parts.

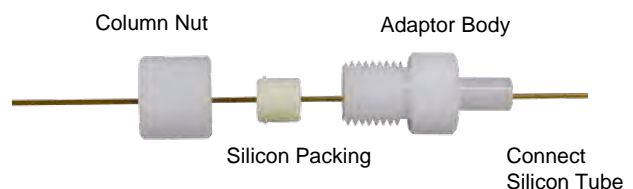

Description	Cat.No.
Digital Flow Meter GLF-1000	2709-11000
Capillary Column Connecting Adaptor	2709-55015

GL Sciences, Inc. Japan  
22-1 Nishishinjuku 6-Chome  
Shinjuku-ku, Tokyo, 163-1130, Japan  
Phone: +81-3-5323-6620  
FAX: +81-3-5323-6621  
email: world@glsc.co.jp

GL Sciences, Inc. USA  
4733 Torrance Blvd. Suite 255  
Torrance, CA 90503  
Phone: 310-265-4424  
FAX: 310-265-4425  
email: info@glsciencesinc.com

International Distributors  
Visit our Website at  
<http://www.glsciences.com/products/contact.html>