


Designed to Retain Polar Analytes and Metabolites with Higher Chemical Stability

Benefits

- HILIC (Hydrophilic-Interaction Chromatography) column for enhanced retention of extremely polar compounds.
- Offering the strongest retentivity among the Amide columns available in the market due to the usage and bonding of carbamoyl groups.
- Superior stability and durability even under water rich mobile phases.


Physical Properties

- Silica : ES (Evolved Surface) Silica Gel
- Particle Size : 3 μm, 5 μm
- Surface Area : 350 m²/g
- Pore Size : 100 Å (10 nm)
- Pore Volume : 0.85 mL/g
- Bonded Phase : Carbamoyl Groups
- End-capping : None
- Carbon Loading : 15 %
- pH Range : 2~8.5
- USP Code : L68

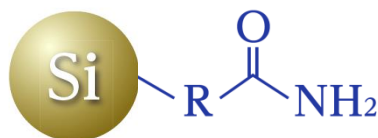


Comparison of Retentivity

HILIC phases are particularly useful for compounds that are weakly retained by reversed-phase columns such as Melamine and Cyanuric Acid. As shown below, InertSustain Amide provides stronger retention for such analytes compared to other HILIC columns available in the market.

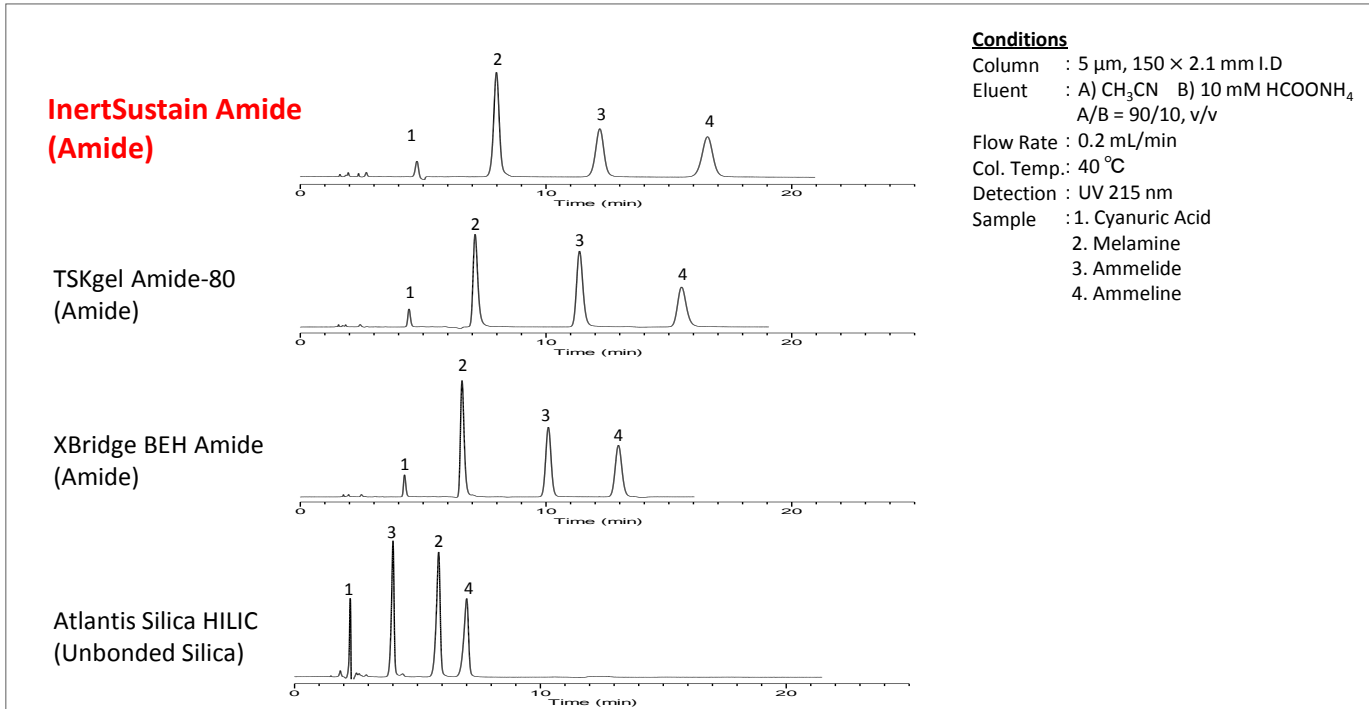

Extreme Durability

The use of metaphosphoric acid aqueous solution as a diluent solvent is a common technique to prevent the decomposition of sample in Vitamin C (Ascorbic acid) analysis. A silica-base Amide type columns often show short column lifetime due to the usage of strongly acidic diluent solvent in the analysis. As proven below, InertSustain Amide offer longer column lifetime even under such harsh analytical condition.

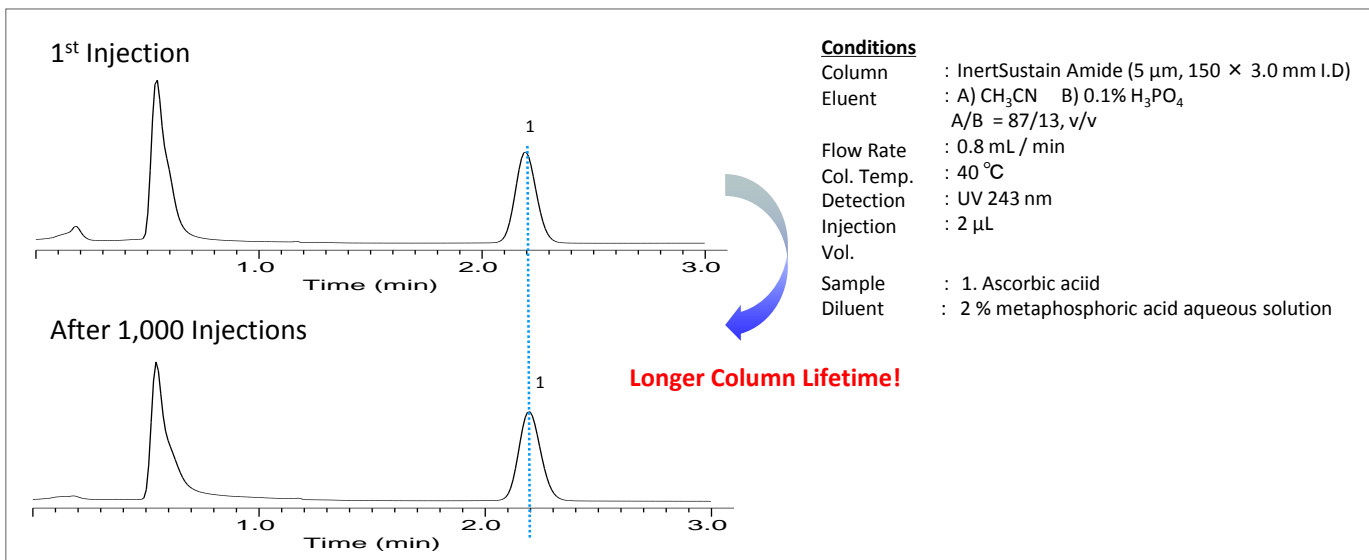

Ordering Information

InertSustain Amide Analytical Columns

Particle Size	Length \ I.D. (mm)	2.1	3.0	4.0	4.6
	3 μ m	50	5020-88727	5020-88735	5020-88743
75		5020-88728	5020-88736	5020-88744	5020-88752
100		5020-88729	5020-88737	5020-88745	5020-88753
150		5020-88731	5020-88739	5020-88747	5020-88755
250		5020-88732	5020-88740	5020-88748	5020-88756
Particle Size	Length \ I.D. (mm)	2.1	3.0	4.0	4.6
	5 μ m	50	5020-88603	5020-88611	5020-88619
75		5020-88604	5020-88612	5020-88620	5020-88628
100		5020-88605	5020-88613	5020-88621	5020-88629
150		5020-88607	5020-88615	5020-88623	5020-88631
250		5020-88608	5020-88616	5020-88624	5020-88632

* End-fittings are 1/16" Waters-compatible.

* Max. Operating Pressure: 20 MPa (200 Bar)

Worldwide Ordering Information

GL Sciences, Inc. USA

4733 Torrance Blvd. Suite 255
Torrance, CA 90503
Phone: 310-265-4424
Fax: 310-265-4425
Email: info@glsciencesinc.com
Web: www.glsciencesinc.com

GL Sciences B.V.


De Sleutel 9
5652 AS Eindhoven
The Netherlands
Phone: +31 (0)40 254 95 31
Email: info@glsciences.eu
Web: www.glsciences.eu

GL Sciences, Inc. Japan

22-1 Nishishinjuku 6-Chome
Shinjuku-ku, Tokyo,
163-1130, Japan
Phone: +81-3-5323-6620
Fax: +81-3-5323-6621
Email: world@glsc.co.jp
Web: www.glsciences.com

International Distributors

Visit our Website at
www.glsciences.com/distributors

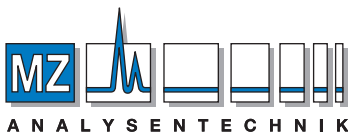

AUTHORIZED DISTRIBUTOR

MZ-Analysentechnik GmbH, Barcelona-Allee 17• D-55129 Mainz
Tel +49 6131 880 96-0, Fax +49 6131 880 96-20
e-mail: info@mz-at.de, www.mz-at.de

The GL Sciences name, the GL Sciences logo and the following registered trademark or trademark are the property of GL Sciences Inc.

InertSustain
Inertsil

All other trademarks or service marks are the property of their respective owners.

The specification and the column type are subject to change without notice due to continual improvements.